

UM-5 Crystal

Part Number Guide

T-M-FF.FFFM-LC-FTFS-OT-ESR-B-G-S

T (Type型号): B=UM-5 Crystal, 2 Leads.

B2=UM-5 Crystal, 3 Leads.

M (Mode of Operation振荡模式): F=Fundamental T=Third Overtone, etc

F (Frequency标称频率): Normal - 5 digitals of Frequency, e.g. 12.000M

Special - All digitals of Frequency, e.g. 13.225625M

LC (Load Capacitance负载电容): 20=20pf 00=series, etc

FT (Frequency Tolerance调整频差): 30= ± 30 ppm, etc

FS (Frequency Stability温度频差): 50= ± 50 ppm, etc

OT (Operating Temperature工作温度): 1060=-10°C to +60°C 4085=-40°C to +85°C, etc

ESR (Equivalent Series Resistance等效阻抗)

B (Bulk Pack散装) OR TR (Tape and Reel编带)

G (Gull Wing夹持器)

S (Special Requirement特殊要求)

A (Automotive车载应用)

Electrical Specifications 电气参数

Item 项目	Spec 规格		Condition 条件
Frequency Range 频率范围	12. 8MHz~74. 125MHz		For furtherquestions regarding specifications, please feel free to contact us. 对于超出标准的规格, 请联系我们
Operating Temperature 工作温度	-20~70℃, -40~85℃		
Drive Level 激励功率	100 μ w max		It is recommended to use 1 μ w~100 μ w 推荐1 μ w~100 μ w
Load Capacitance 负载电容	7pF~∞		For furtherquestions regarding specifications, please feel free to contact us. 对于超出标准的规格, 请联系我们
Frequency Tolerance 调整频差	±30ppm Standard (±10~±50ppm Available)		
Frequency Stability 温度频差	±15ppm@-20~70℃ ±30ppm@-40~85℃		
Aging 老化率	±5ppm		
Storage Temperature 储存温度	-55~125℃		
ESR 等效阻抗 (Ω)	12. 8MHz≤F0<20MHz	30 Ω	
	20MHz≤F0<45MHz	25 Ω	
	45MHz≤F0<74. 125MHz (Third overtone)	60 Ω	




Pb Free

RoHS Compliant

Mechanical Dimensions 外型尺寸

TWO LEADS (两引线) UNIT (单位): mm (毫米)

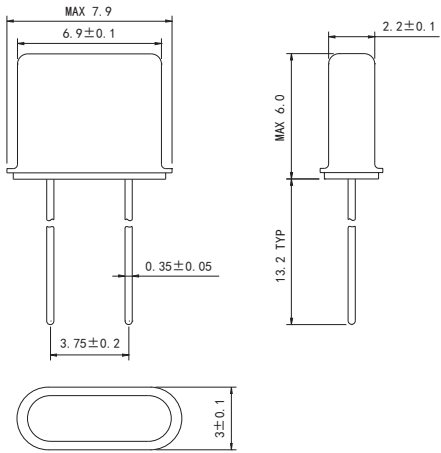

THREE LEADS (三引线) UNIT (单位): mm (毫米)

