

2x6 TUNING FORK(KHZ)

Part Number Guide

T-FF.FFFK-LC-FT-OT-ESR

T(Type型号):WB=2×6 Tuning Fork

F(Frequency标称频率)

LC(Load Capacitance负载电容):12.5=12.5pf 00=series, etc

FT(Frequency Tolerance调整频差):30=±30 ppm, etc

OT(Operating Temperature工作温度):1060=-10℃ to +60℃ 4085=-40℃ to +85℃, etc


ESR(Equivalent Series Resistance等效阻抗)

A(Automotive车载应用)

Electrical Specifications 电气参数

Item 项目	Spec 规格	Condition 条件
Frequency Range 频率范围	25KHz~200KHz	For further questions regarding specifications, please feel free to contact us. 对于超出标准的规格,请联系我们
Operating Temperature 工作温度	-40~85℃	
Drive Level 激励功率	1 μw max	
Load Capacitance 负载电容	5~30pF	
Frequency Tolerance 调整频差	±10ppm~±30ppm	
Temperature Coefficient 温度系数	-0.035±0.01ppm/℃ ²	
ESR 等效阻抗 (Ω)	40KΩ max	
Storage Temperature 储存温度	-55~125℃	


Frequency vs. Temperature Curve 频率温度曲线

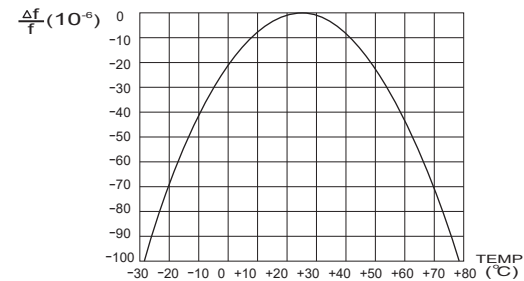

Pb Free

RoHS Compliant

Mechanical Dimensions 外型尺寸

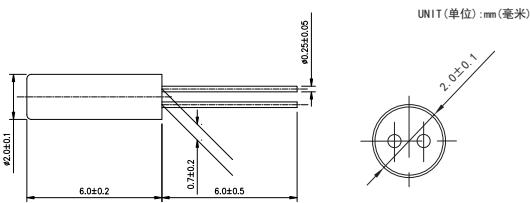

Lead Forming (引线折弯)

